



NW TRAILER SALES & SERVICE

27890 Fairground Road Adel, IA 50003

Ph: 515-993-3770 Fax: 515-993-5335

www.nwtrailer.com



shown with optional toolbox

Car/Machinery Trailer


81" x 12' to 22'

Tandem Axle- 3500# /axle

- A 36 Grade Steel Construction
- Main Frame- 5" Channel
- Heavy-duty 5" channel wrap around tongue
- 4-Leaf Eye-to-Eye Suspension- 9,600 lbs capacity
- ST225 x 15" radial tires, LR D
- 5-Bolt Wheel – 5 on 4 1/2" bolt pattern – 15" rim
- 7700 lbs. GVWR
- Electric Brakes on both axles
- Breakaway kit with charger
- Dropleg Jack – 7,000 lbs. lift
- 2 5/16" A-Frame Bulldog Coupler with Latch Pin Keeper
- Safety Chains
- Front Rail – 2" square tube
- Slide-in Ramps – 5' long, 16" wide
- Treated Deck Lumber Flooring – 2"x 10"
- Cross Members on 18" centers – 3" Channel
- Tear Drop Fenders with backs
- Cargo Tiedowns / Stake Pockets
- Approved DOT sealed beam lighting in protective steel box
- 14 gauge wiring – coated, housed in steel tubing
- All electrical connections soldered and sealed
- 6 or 7 pole connector
- Color- black

Options:

- Special color
- Spare tire and wheel
- Spare tire mount
- Deckplate floor or fenders
- 2' deckplate beaver tail
- Adjustable pintle hitch
- Adjustable 2 5/16" ball hitch
- 5200 lbs. axle package
- D-Rings (4)
- 83" wide b/e fenders
- Aluminum ramps
- Flip-up heavy-duty ramps
- Federal DOT conspicuity tape
- 4" drop axles
- Utility rail
- Heavy-duty ramp gate
- LED lighting

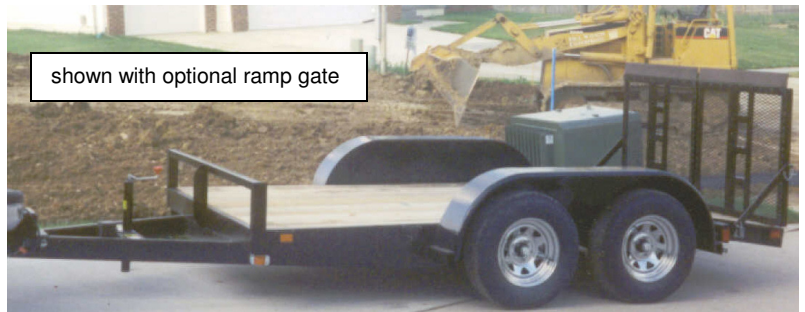

shown with optional ramp gate

81" x 12'

81" x 14'

81" x 16'

81" x 18'

81" x 20'

81" x 22'